




Extended Range

---

Art Select












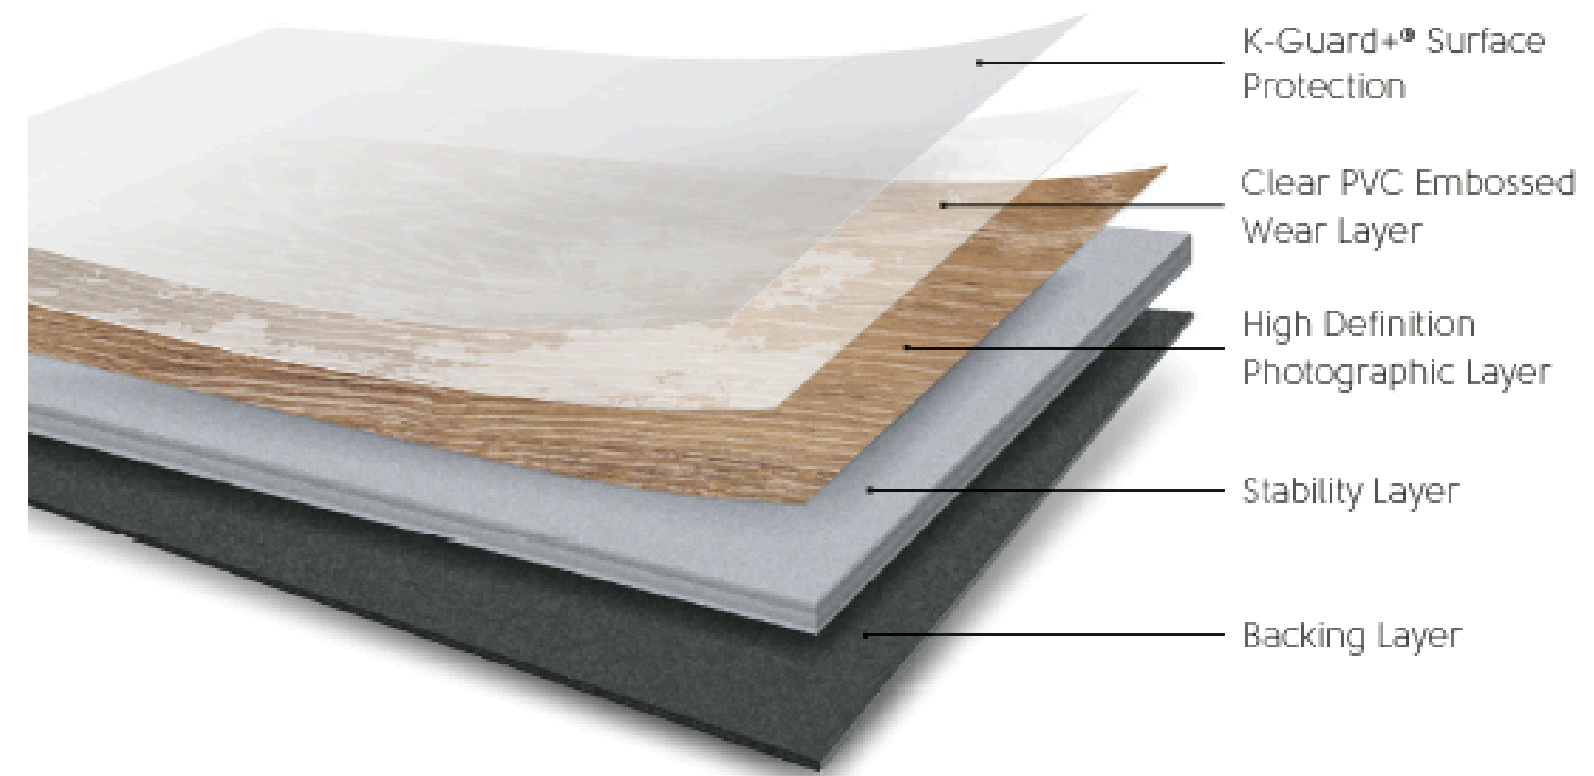















# Why Art Select?


Art Select gluedown offers bespoke, handcrafted designs inspired by the highest quality wood and stone species. This range demonstrates the pinnacle of our design excellence with unique embossing and textures on the surface of the products, distinct bevelled edges that enhance each plank and tile, and captivating designs that inspire.



	Standard	Result
 Thickness	EN ISO 243 46	3,0 mm
 Wear layer	EN ISO 243 40	0,7 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light Industrial Commercial Residential	20 years 20 years Lifetime guarantee
 Bevelled edge		Standard
 Mass per unit area	EN ISO 23997	5015 g/m <sup>2</sup>
 Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
 Classification	EN 685 / EN ISO 10874: Light industrial EN 685 / EN ISO 10874: Commercial EN 685 / EN ISO 10874: Domestic	43: Light industrial heavy 34: Commercial very heavy 23: Domestic heavy
 Reaction to fire	EN 13501-1	B <sub>f</sub> -s1
 Staining resistance	EN ISO 26987 / EN 423	Excellent
 Light fastness	EN ISO 105-B02	Pass (≥6)
 Abrasion resistance	EN 660-2 EN ISO 10582	Group T Type 1
 Flexibility	EN ISO 243 44	Pass
 Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
 Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 2 dB
 Electrical behaviour body voltage	EN 1815	Pass
 Indentation – residual	EN 433 / EN ISO 24343-1	Pass (≤0,1 mm)
 Castor chair continuous use	EN 425 / ISO 4918	Pass
 Thermal resistance	ISO 8302	0,0147 m <sup>2</sup> K/W Suitable for under floor heating. Max 27°C
 Slip resistance**	EN 13893 DIN 51130	D5 R10
 Adhesive		Please refer to our recommended adhesive list
 Environmental	French VOC regulation (ISO 16000) Indoor Air Comfort  Floorscore SCS-EC10.3-2014 v4.0  Environmental Product Declaration DIBt/AgBB  ISO 14001 / ISO 9001	A+ Gold certification; Compliant low emitting VOC emissions.  Indoor air quality certified; Compliant low emitting VOC emissions.  External third-party verified Type III EPD Pass  Manufactured to quality and environment management systems standards



# Wood designs



114mm x 114mm / 76mm x 305mm



Spring Oak SBW-RL01



4-6 week lead time



Additional shipping costs may apply due to overseas shipping


Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years







# Wood designs




228mm x 76mm



Spring Oak AP01



Dawn Oak AP02

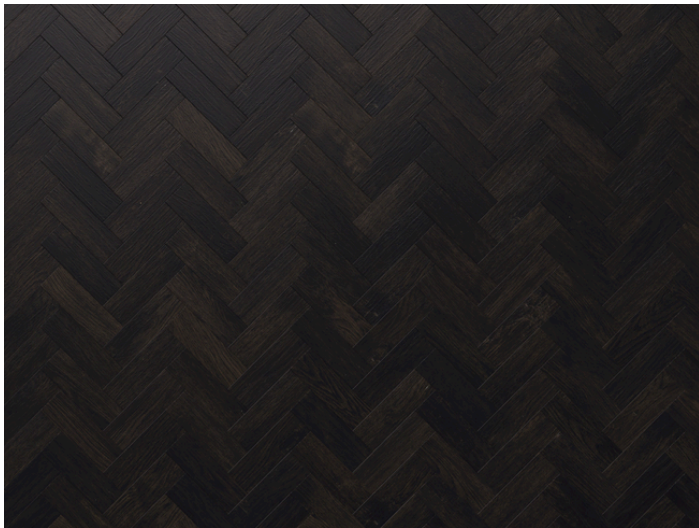

Midnight Oak AP03




4-6 week lead time



Additional shipping costs may apply due to overseas shipping



Spanish Cherry AP05

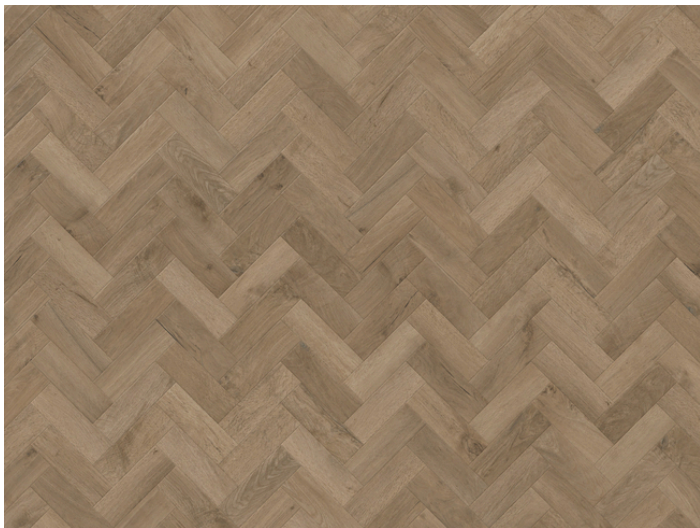

Salon Oak AP08


Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years







# Wood designs



457mm x 76mm



Golden Artisan Oak SM-RL31



Prairie Oak SM-RL20




Mountain Oak SM-RL22




4-6 week lead time



Additional shipping costs may apply due to overseas shipping

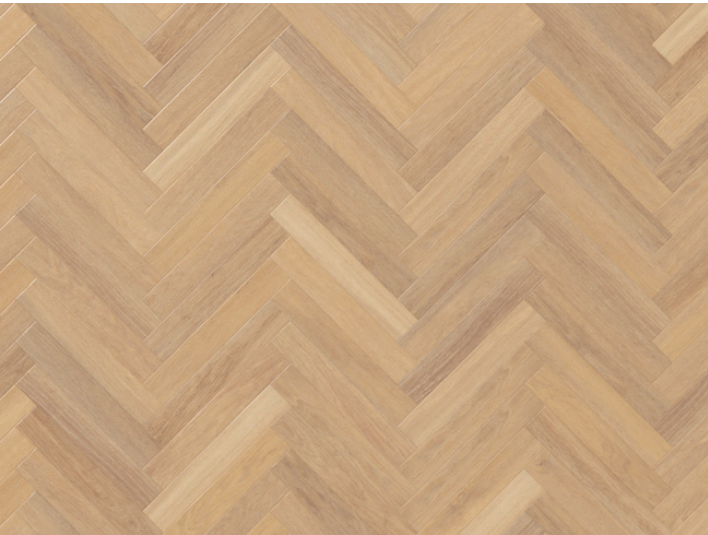

Savannah Oak SM-RL23

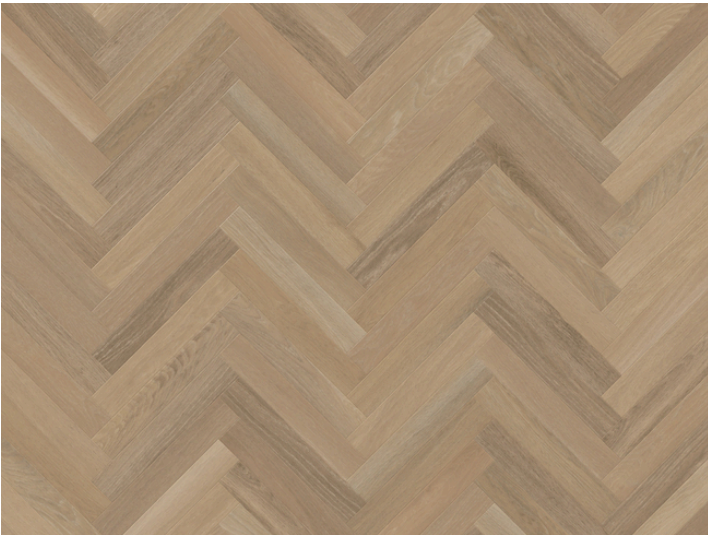

Dune Oak SM-RL24

Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years










Savannah Oak SM-RL23




# Wood designs




711mm x 114mm



Basque Oak SM-RL26

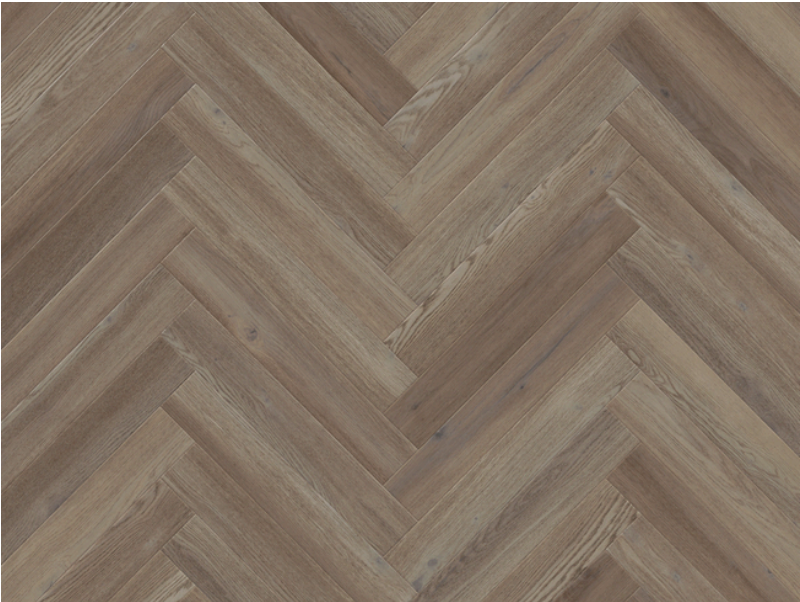

Bellota Oak SM-RL27

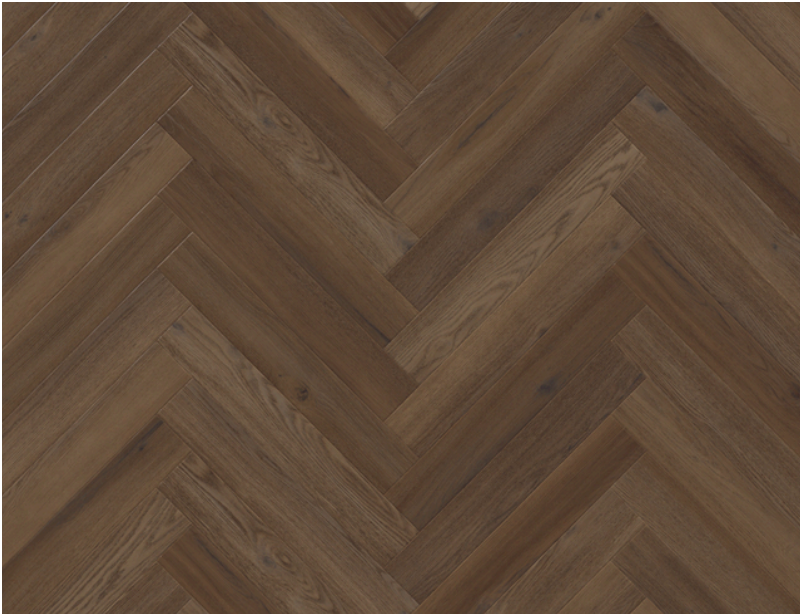

Serrano Oak SM-RL28

915mm x 152mm



Hickory Nutmeg EW03



4-6 week lead time



Additional shipping costs may apply.


Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years







# Wood designs



1219mm x 178mm



Spring Oak RL01



Salon Oak RL13



4-6 week lead time



Additional shipping costs may apply due to overseas shipping

1219mm x 114mm



Canyon Oak RL25



Natural Oak RL48

Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years





Salon Oak RL13



Natural Oak RL48



# Wood designs


1422mm x 228mm



4-6 week lead time



Additional shipping costs may apply due to overseas shipping



Dune Oak RL24



Basque Oak RL26



Bellota Oak RL27



Serrano Oak RL28



Golden Artisan Oak RL31



Pale Artisan Oak RL32

Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years







Dune Oak RL24 | Calacatta d'Oro LM 33 & Pavimento Bianco LM42



# Stone designs



457mm x 457mm

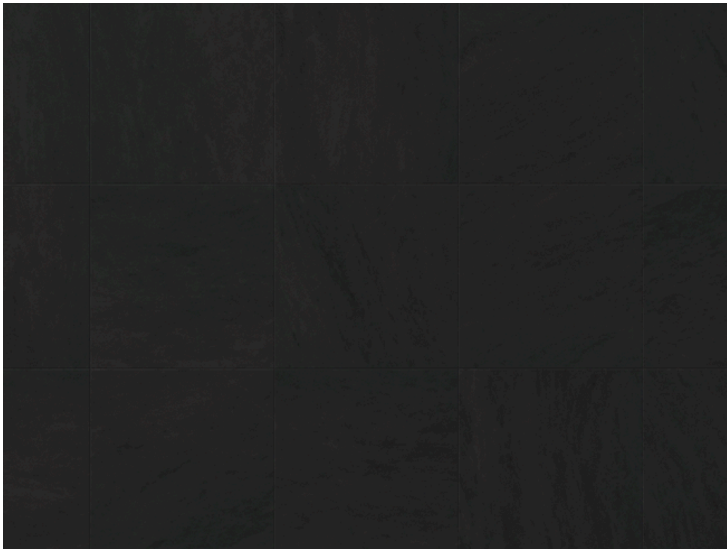

Corinthian Marble LM31



Doric Marble LM32



4-6 week lead time



Additional shipping costs may apply due to overseas shipping

Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years





Doric Marble LM32



Doric Marble LM32




# Stone designs


457mm x 915mm




Calacatta d'Oro LM33

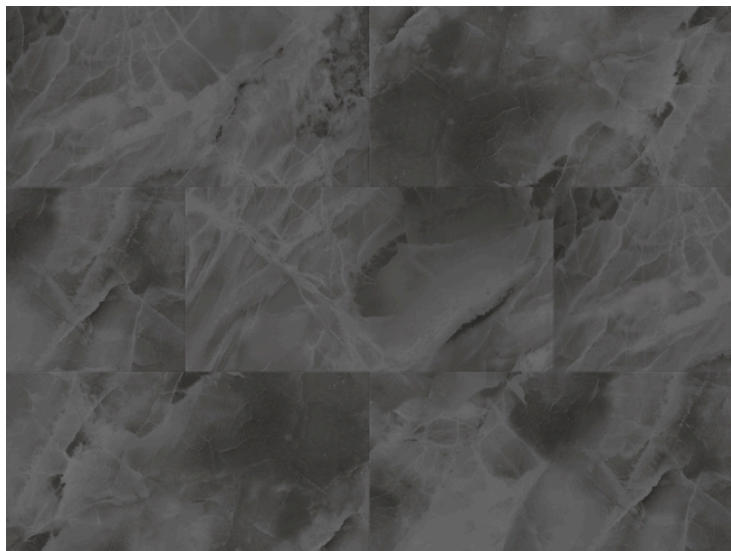

Black Onyx LM34

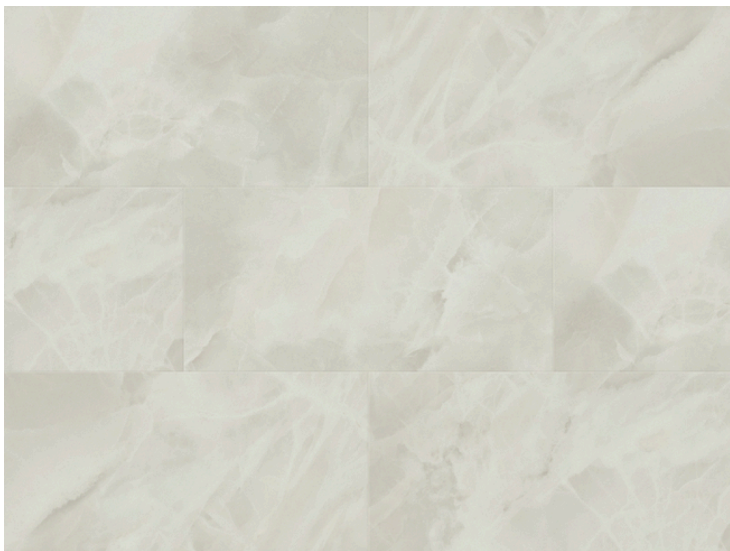

Pearl Onyx LM35

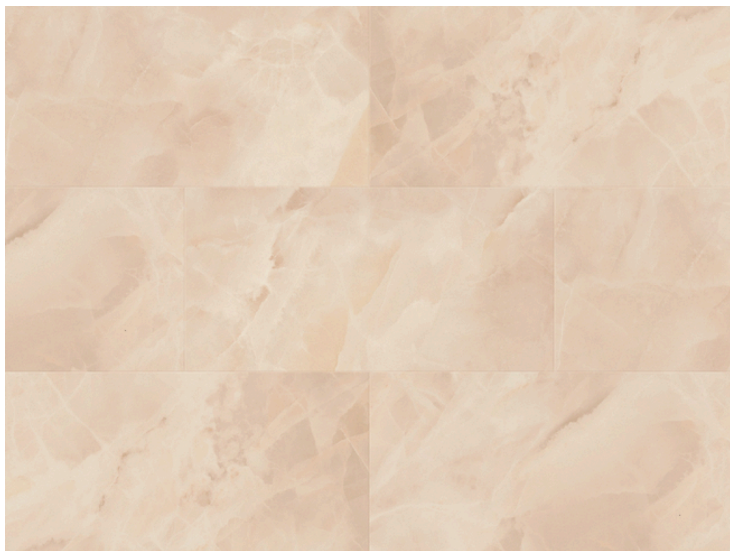

Rose Onyx LM36



Pavimento Crema LM40




Pavimento Grigio LM41



4-6 week lead time



Additional shipping costs may apply due to overseas shipping



Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years






Black Onyx LM34



Rose Onyx LM36



# Stone designs



457mm x 915mm




Pavimento Bianco LM42



Brezza Ceppo LM43



Sabia Ceppo LM44

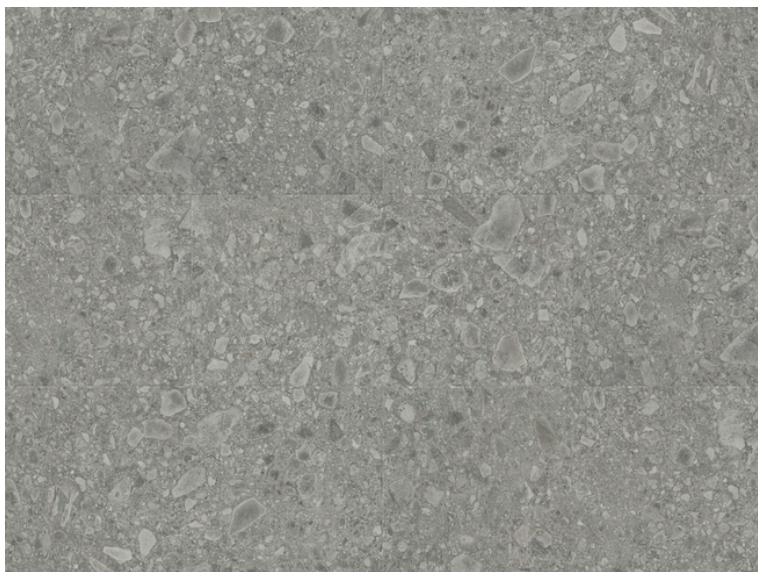

Naturale Ceppo LM45



4-6 week lead time



Additional shipping costs may apply due to overseas shipping

Thickness	3,0mm
Wear layer	0,7mm
Bevelled edge	Standard
Commercial guarantee	20 years





Brezza Ceppo LM43 | Dune Oak RL24





Pavimento Bianco LM42





For more information on how Designflooring  
can support you, contact:

**+49 (0)211 469 592 03**

**[sales@designflooring.com](mailto:sales@designflooring.com)**

**[designflooring.com](https://www.designflooring.com)**

